

PT 5600 - K

COMPOSITION:

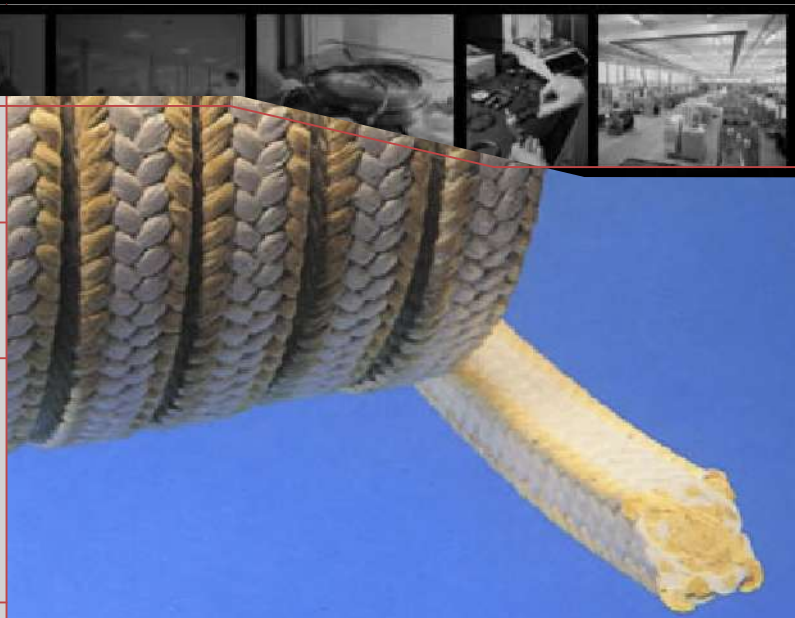
- PTFE YARN
- ARAMIDIC FIBER YARN

FEATURES:




MANUFACTURED FROM PURE PTFE FIBRE YARN WITH ALL FOUR CORNERS REINFORCED WITH ARAMIDIC FIBER YARN THAT GENERATE A STRONG RESISTANCE TO EXTRUSION AND HIGH PRESSURE. THIS BRAIDED PACKING DOES NOT STAIN AND IS IDEAL FOR FOOD AND CHEMICAL INDUSTRIES.

APPLICATIONS:

FOR PISTON PUMPS, AGITATORS, VALVES, MIXERS; SUITABLE FOR ACIDS, SOLVENTS, ABRASIVE SUBSTANCES IN PAPER MILLS, IN THE FOOD AND CHEMICALS INDUSTRIES.



TECHNICAL DATA

(*)				
T	°C	-200 +280		
p	bar	500	300	
V	m/s	1,5	2	
pH		3÷12		

(*) Do not use the product to the maximum temperature and pressure associated without consulting the manufacturer.

size mm	size inch	kg/box	lbs/box	mt/box	ft/box	mt/kg	ft/lbs
3	1/8	1,0	2,2	65,4	214	65,4	97,4
4	-	1,0	2,2	36,8	121	36,8	54,8
5	3/16	1,0	2,2	23,5	77	23,5	35,0
6	-	2,5	5,5	40,8	134	16,3	24,3
6,5	1/4	2,5	5,5	34,8	114	13,9	20,7
8	5/16	2,5	5,5	23,0	75	9,2	13,7
9,5	3/8	2,5	5,5	16,3	53	6,5	9,7
10	-	2,5	5,5	14,7	48	5,9	8,8
11	7/16	2,5	5,5	12,2	40	4,9	7,2
12	-	2,5	5,5	10,2	34	4,1	6,1
12,7	1/2	2,5	5,5	9,1	30	3,6	5,4
14	9/16	5,0	11,0	15,0	49	3,0	4,5
16	5/8	5,0	11,0	11,5	38	2,3	3,4
17,5	11/16	5,0	11,0	9,6	32	1,9	2,9
18	-	5,0	11,0	9,1	30	1,8	2,7
19	3/4	5,0	11,0	8,1	27	1,6	2,4
22	7/8	5,0	11,0	6,1	20	1,2	1,8
25,5	1	5,0	11,0	4,5	15	0,9	1,3

packaged +/- 10 % in weight

