

55B

COMPOSITION:

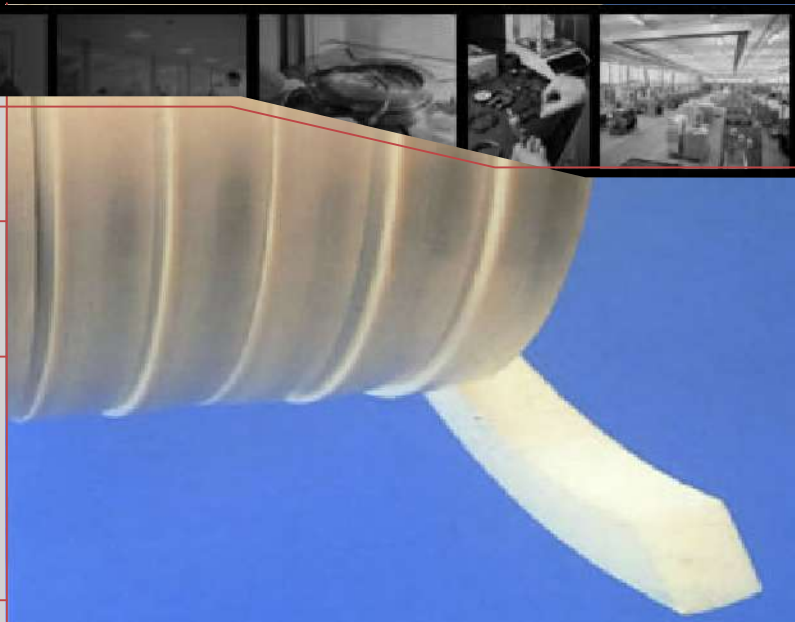
- EXTRUDED PTFE
- LUBRICANT

FEATURES:




55B IS AN EXTRUDED NON-SINTERED PURE LUBRICATED PTFE. 55B DOES NOT DAMAGE OR SCORE THE SHAFT THANKS TO ITS SOFTNESS AND ADAPTS ITSELF TO ANY UNEVENNESS. DUE TO THE HIGH PTFE CONTENT, IT RESISTS CHEMICAL ATTACKS OVER THE ENTIRE PH RANGE.

APPLICATIONS:

SUITABLE FOR ACIDS AND ALKALIS, OILS, GASES, SOLVENTS AND STEAM. IT CAN BE USED WITH CLEAN FLUIDS, ON CENTRIFUGAL AND PLUNGER PUMPS, MIXERS, AGITATORS, ON VALVES, EXPANSION JOINTS AND ON VACUUM PUMPS.



TECHNICAL DATA

(*)				
T	°C	-50 +260		
p	bar			10
V	m/s			10
pH		0 ÷ 14		

(*) Do not use the product to the maximum temperature and pressure associated without consulting the manufacturer.

size mm	size inch	kg/box	lbs/box	mt/box	ft/box	mt/kg	ft/lbs
3	1/8	1	2,2	61,7	203	61,7	91,9
4	-	1	2,2	34,7	114	34,7	51,7
5	3/16	1	2,2	22,2	73	22,2	33,1
6	-	2,5	5,5	38,6	127	15,4	23
6,5	1/4	2,5	5,5	32,9	108	13,1	19,6
8	5/16	2,5	5,5	21,7	71	8,7	12,9
9,5	3/8	2,5	5,5	15,4	50	6,2	9,2
10	-	2,5	5,5	13,9	46	5,6	8,3
11	7/16	2,5	5,5	11,5	38	4,6	6,8
12	-	2,5	5,5	9,6	32	3,9	5,7
12,7	1/2	2,5	5,5	8,6	28	3,4	5,1
14	9/16	5	11	14,2	46	2,8	4,2
16	5/8	5	11	10,9	36	2,2	3,2
17,5	11/16	5	11	9,1	30	1,8	2,7
18	-	5	11	8,6	28	1,7	2,6
19	3/4	5	11	7,7	25	1,5	2,3
22	7/8	5	11	5,7	19	1,1	1,7
25,5	1	5	11	4,3	14	0,9	1,3

packaged +/- 10 % in weight

