

55 G

COMPOSITION:

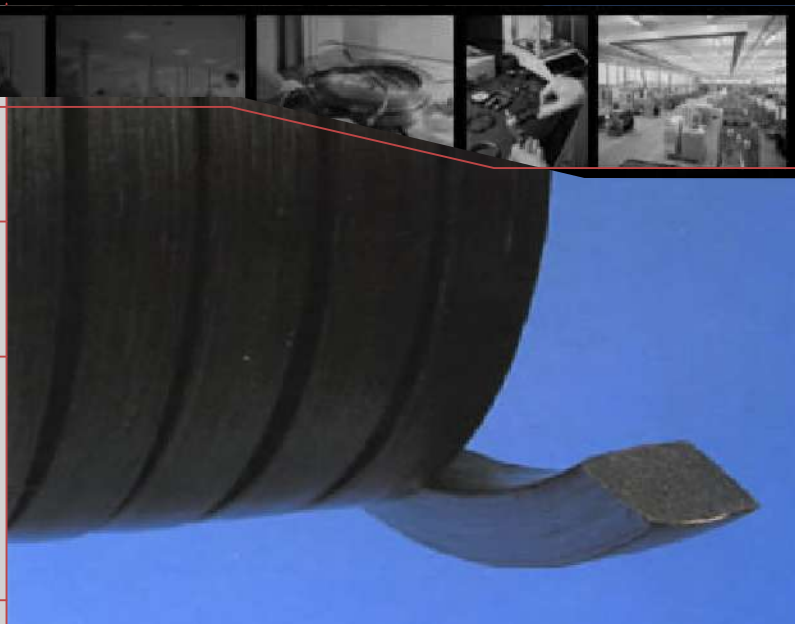
- EXTRUDED GRAPHITE LOADED PTFE
- LUBRICANT

FEATURES:




55G IS AN EXTRUDED PURE LUBRICATED AND GRAPHITISED PTFE, NON-SINTERED. 55G MINIMIZE DAMAGES ON THE SHAFTS THANKS TO ITS SOFTNESS AND ADAPT ITSELF TO ANY UNVENNESS. DUE TO THE HIGH PTFE CONTENT, IT RESISTS CHEMICAL ATTACKS OVER THE ENTIRE PH RANGE.

APPLICATIONS:

SUITABLE FOR ACIDS AND ALKALIS, OILS, GAS, SOLVENTS AND STEAM. IT CAN BE USED WITH CLEAN FLUIDS, ON CENTRIFUGAL AND PLUNGER PUMPS, MIXERS, AGITATORS, ON VALVES, EXPANSION JOINTS AND ON VACUUM PUMPS.



TECHNICAL DATA

(*)			
T	°C	-50 +260	
p	bar		10
V	m/s		10
pH		0 ÷ 14	

(*) Do not use the product to the maximum temperature and pressure associated without consulting the manufacturer.

size mm	size inch	kg/box	lbs/box	mt/box	ft/box	mt/kg	ft/lbs
3	1/8	1	2,2	61,7	203	61,7	91,9
4	-	1	2,2	34,7	114	34,7	51,7
5	3/16	1	2,2	22,2	73	22,2	33,1
6	-	2,5	5,5	38,6	127	15,4	23
6,5	1/4	2,5	5,5	32,9	108	13,1	19,6
8	5/16	2,5	5,5	21,7	71	8,7	12,9
9,5	3/8	2,5	5,5	15,4	50	6,2	9,2
10	-	2,5	5,5	13,9	46	5,6	8,3
11	7/16	2,5	5,5	11,5	38	4,6	6,8
12	-	2,5	5,5	9,6	32	3,9	5,7
12,7	1/2	2,5	5,5	8,6	28	3,4	5,1
14	9/16	5	11	14,2	46	2,8	4,2
16	5/8	5	11	10,9	36	2,2	3,2
17,5	11/16	5	11	9,1	30	1,8	2,7
18	-	5	11	8,6	28	1,7	2,6
19	3/4	5	11	7,7	25	1,5	2,3
22	7/8	5	11	5,7	19	1,1	1,7
25,5	1	5	11	4,3	14	0,9	1,3

packaged +/- 10 % in weight

