

C 8200

COMPOSITION:

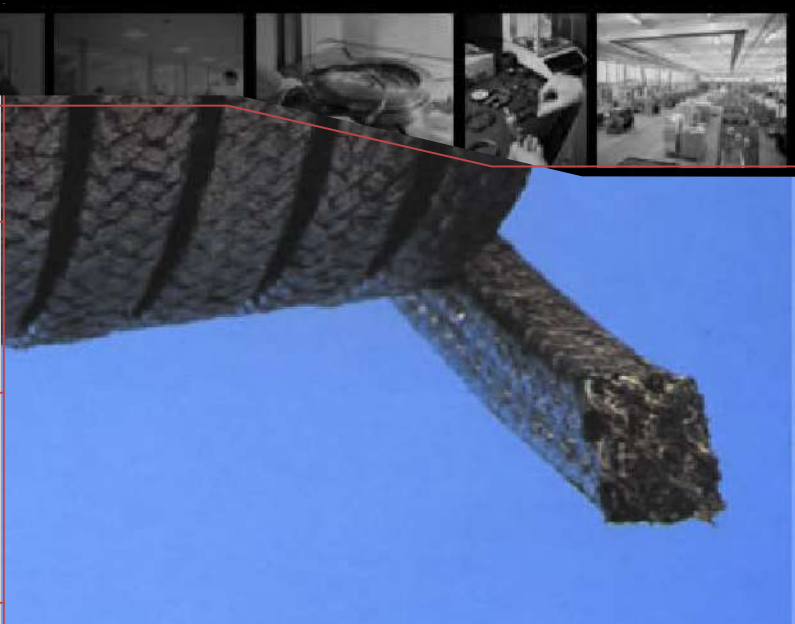
- PRE-OXIDIZED CARBON YARN
- GRAPHITE IMPREGNATION
- CORROSION INHIBITOR

FEATURES:




PACKING MADE FROM ASBESTOS FREE P.A.N. FIBRES AND PRE-OXIDIZED PAIRED CARBON. THIS PACKING IS IMPREGNATED STRAND BY STRAND WITH PURE GRAPHITE AND WITH A CORROSION INHIBITOR.

APPLICATIONS:

FOR VALVES AND PLUNGER PUMPS, IN STEAM, AIR, GAS, OILS AND BITUMEN. COMPATIBLE WITH CHEMICAL AND PETROCHEMICAL PRODUCTS.



TECHNICAL DATA

				
(*)				
T	°C	-50 +350 (1) / + 500 (2)		
p	bar	150	100	45
V	m/s	1	2	20
pH		2 ÷ 12		

(1) With oxidizing media

(2) Peak limit for short time

(*) Do not use the product to the maximum temperature and pressure associated without consulting the manufacturer.

